

Guardian 2-way Mobile Device Specifications (2-way video)

Physical Dimensions:

Base Footprint: 31" x 34"
 Weight: 65.9 lbs
 Height: 78"
 Construction: Cast and extruded aluminum
 steel and molded ABS/PVC thermoplastic

Power Specifications:

Input: 100-240 VAC, 50/60Hz
 Max Current Draw: 6.0 Amp
 Typical Current Draw: 700 mA
 Cable Length: 10 ft. NEMA 5-15P to IEC 60320 C13
*Replacement or Non-standard length cords available for purchase
 Contact info@avasure.com for a quote*

Mobile Device Certification:

Control Number: 5022036
 Conforms to UL STD. 62368-1
 Certified to CSA STD. C22.2#62368-1
 FCC Title 47 CFR Part 15

Operating Conditions:

0 – 46 °C (32 – 115 °F)

Per Device Bandwidth Requirements:

Average: 1.5 Mbps
 Average with Infrared: 1.8 Mbps
 Peak with full range PTZ: 3.0 Mbps

Camera Resolution:


1920x1080 to 320x180; 1280x720 Typical

Audio System:

Microphone element sensitivity –38dB +/- 3db
 Frequency response 90Hz – 8.3kHz
 Speaker power output 10 W
 Two-way, half duplex (default), full duplex

Touchscreen:

Size: 18.5" diagonal
 Resolution: 1920x1080 capable, 16:9 aspect ratio, 16,777,216 colors
 Brightness: 400 Cd/m² Typical
 Viewing angle: adjustable between -5°(down) to 20°(up)
 Touchscreen: Glass, capacitive

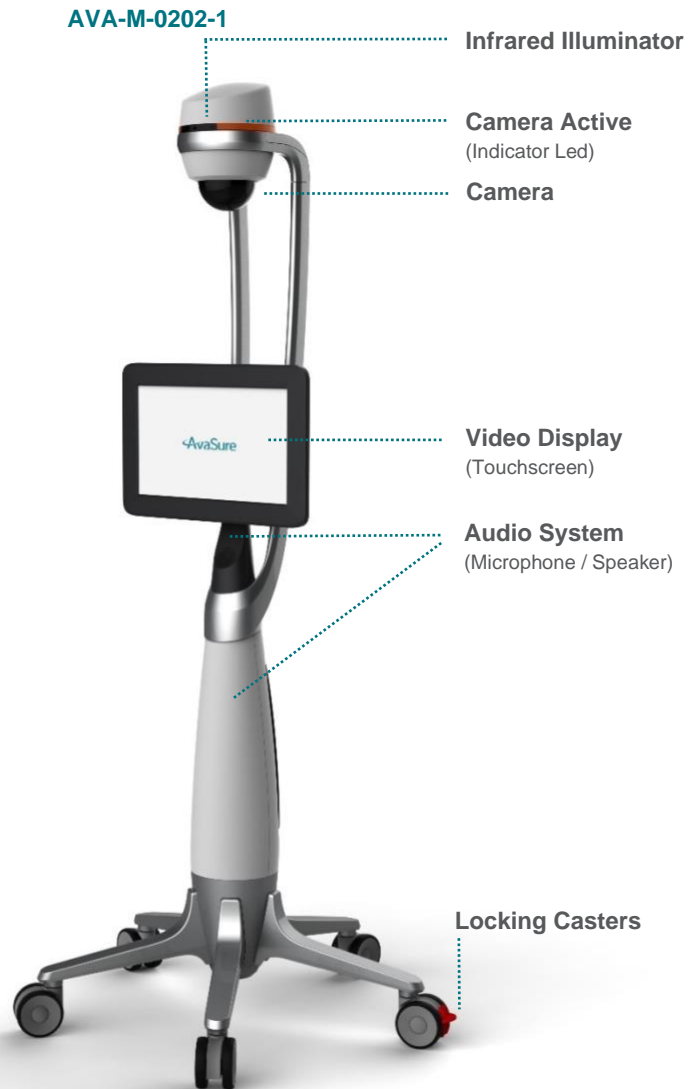

⚠ WARNING: These products contain chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. For more information:
<http://www.P65warnings.ca.gov/>